



Washroom Facilities

PKL Washroom facilities are built to the highest quality standards and offer a clean and hygienic environment.



- Ideal during refurbishments
- Use as extra facilities
- Link in to an existing building
- Link to one of our Portable Kitchens



External Dimensions

Length	8.40m
Width	3.20m
Height	2.84m
Height on lorry	4.20m
Weight	6.0 tonnes per module

Specifications are subject to change please call our Fleet Administration Department prior to hire for confirmation of details.

General Features

- Compliance with UK building regulations
- Infestation-proof construction
- Castor mounted servery equipment
- Easijack removable jacklegs
- 500 lux lighting level
- Convector heaters

Health and Safety Features

- Compliance with UK building regulations
- Non slip safety flooring (various

Standard Fitted Equipment

The Toilet Unit is delivered on our hiab lorries with an overall length of 15.00m, width 3.00m and height 4.20m. When planning for your kitchen, please check your access route carefully taking into account potentially soft ground, gate posts, low bridges, trees, overhead wires and turning circles. For problem sites the facility can be positioned by a minimum 25 ton crane.

The Toilet Unit should be cited on firm ground such as concrete or tarmac with weight spreaders under each support post. Where the ground is otherwise unsuitable, it is recommended to lay timbers or appropriate temporary foundations for delivery and for the units to rest on.

Should you require any advice or assistance regarding any technical or delivery aspect of a Portable Kitchen, please call our experienced sales staff who will be pleased to help you.



Services and Requirements

- Commando plug and socket supplied by PKL
- Water pressure required 1.5 – 6 bar
- Water softening required to hard water areas
- A manually operable gas valve need to be located in a readily accessible position near an emergency exit. If this is a not practicable an emergency stop must be installed in this positin and wired back to an electrical isolation valve


Services Key

EI Electrical Inlet
63 amp single phase high level external connection through RCCD and commando plug socket supplied. The average running load is 30 amps.

Equipment Key

WI Water Inlet One / two 1/2" female plus one / two 3/4" female connection points for head pressure supply between 1.5 to 6 bar is provided.

F2 Foul Outlet One / two 1 1/2" BSP foul female connection points are provided.

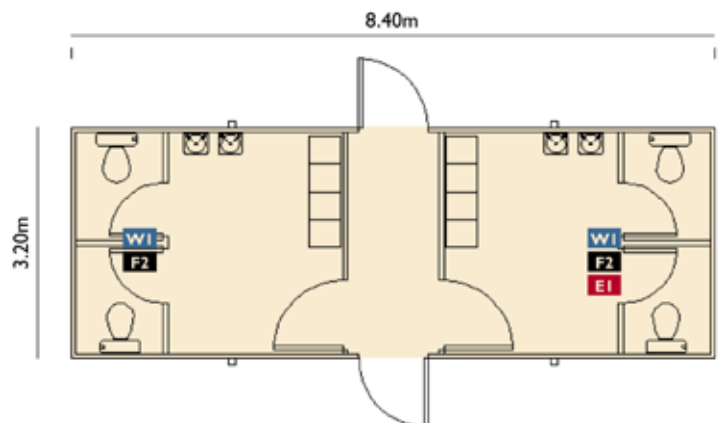

PKL will provide a service engineer, once connection to services has been carried out by others



www.pkl.co.uk



0845 840 42 42



postbox@pkl.co.uk

PKL Group (UK) Ltd, Stella Way, Bishops Cleeve, Cheltenham GL52 7DQ

